

FIR LIGHTING

LED Outdoor Lights

2021-2022

Inground light · Wall light · Flood light · Wall washer · Linear light · Street light · Step light



ABOUT US

FIR Lighting was established in 2013, located in Guangzhou, China. With its 3,000 square meter factory. In 2020, there are about 150 employees including 12 engineers.

FIR Lighting has concentrated on high-end outdoor LED luminaire in the fields of landscape lighting and construction lighting, such as flood lights, garden lights, inground lights, underwater lights, pool lights, wall lights, and wall washer since established.

We always insist original design with self-own molds and intellectual property. As a key component, company uses the market leading brands such as CREE, OSRAM, Bridgelux and Epistar for its LED light source.

FIR Lighting is sticking to providing good quality products and complete services, continuous technical innovation and creating values to customers all the time. Looking forward to working with global partners and be your most reliable supplier.

For more information, please visit our official website www.firlighting.com.



CONTENTS

Inground light	P4-P13
Flood light/Spot light	P14-P20
Street light/Highbay	P21-P22
Wall washer/Linear light	P23-P26
Point light source/Step light/Window sill lamp	P27-P28
Outdoor wall light	P29-P31

INGROUND LIGHT

IG-01




Product Benefits:

Compact inground LED fixture. High quality 304SS cover ring/recessing housing. CREE XPE 1/1.5/2W chips. Easy for installation.

Application:

landscape decorative lighting, square, garden, step.

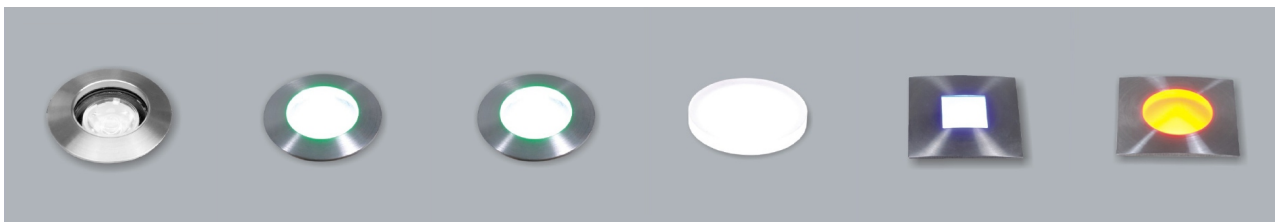

304SS Recessing housing

IG-01-1

IG-01-2

IG-01-3

IG-01-4

IG-01-5

IG-01-6


Item No.	LED Chips	Color	Size	Cover Ring	Housing	Input Voltage	Optics	Beam angle	IP Rating
IG-01-1	CREE 1W/2W	W/R/G/B	Dia43mm	304 SS	Aluminium	DC24V	Clear glass	15degree	IP67
IG-01-2	CREE 1W/2W	W/R/G/B	Dia43mm	304 SS	Aluminium	DC24V	Frosted glass	-	IP67
IG-01-3	CREE 1W/2W	W/R/G/B	Dia43mm	304 SS	Aluminium	DC24V	PMMA	-	IP67
IG-01-4	CREE 1W/2W	W/R/G/B	Dia43mm	PMMA	Aluminium	DC24V	PMMA	-	IP67
IG-01-5	CREE 1W/2W	W/R/G/B	43x43mm	304 SS	Aluminium	DC24V	PMMA	-	IP67
IG-01-6	CREE 1W/2W	W/R/G/B	43x43mm	304 SS	Aluminium	DC24V	PMMA	-	IP67

INGROUND LIGHT

IG-02



1 Light sector

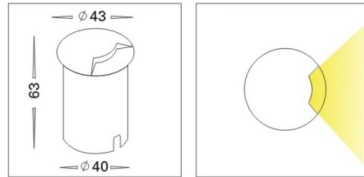


Product Benefits:



Compact inground LED fixture. CREE XPE 1/1.5/2W chips. High quality 304SS cover ring/ recessing housing. Easy for installation.

Application:


landscape decorative lighting, square, garden.



2 Light sector

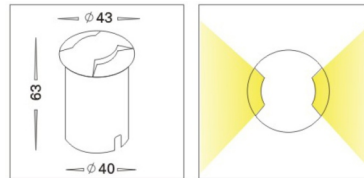

3 Light sector

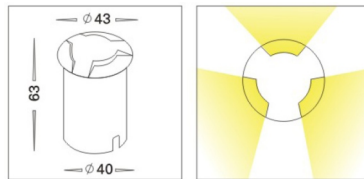

Item No.	LED Chips	CCT	Size	Cover Ring	Housing	Recessing housing	Input Voltage	IP Rating
IG-02	CREE 1W/2W	2000-6000K	Dia43mm	304 SS	Aluminium	304SS	DC24V	IP67

INGROUND LIGHT


IG-01A



Size	Dia10/12/15/20/22/32mm
Power	0.2/0.2/0.3/0.4/0.5/1W
Color	W/R/G/B/Y
Housing	304 stainless steel
Cover Ring	304 stainless steel
Recessing housing	PC
Input voltage	DC12/24V
IP Rating	IP67




clear glass/frosted glass

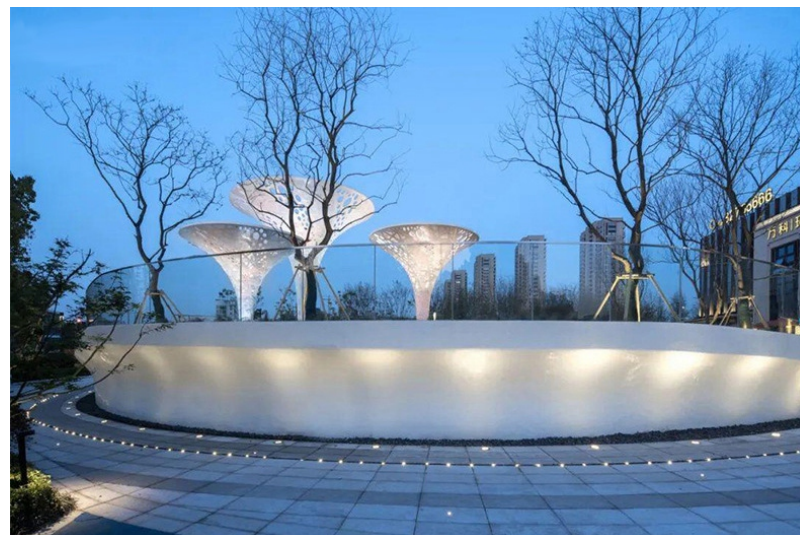

INGROUND LIGHT

IG-02A

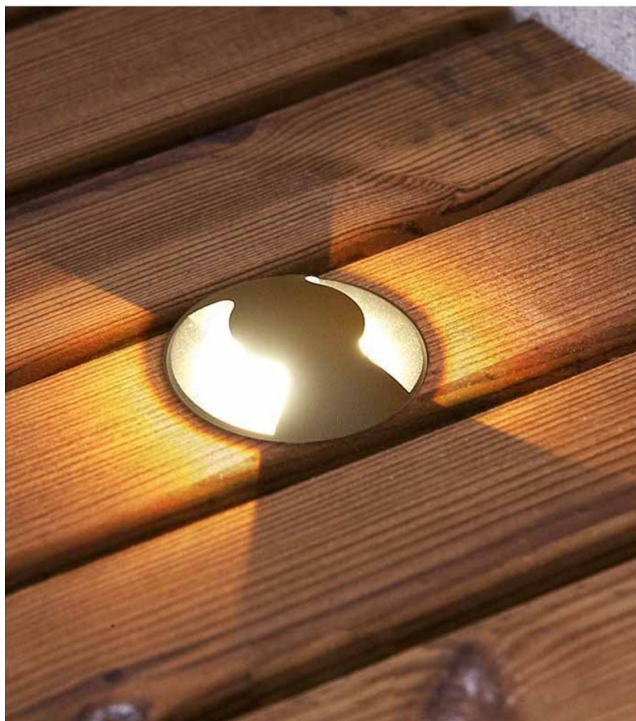

1/2/3/4 light sector optional

Item No.	Power	Color	Size	Cover Ring	Housing	Recessing housing	Input Voltage	IP Rating
IG-02A-42	1W	W/R/G/B/Y	Dia42mm	304 SS	304 SS	PC	DC12/24V	IP67
IG-02A-52	1.5W	W/R/G/B/Y	Dia52mm	304 SS	304 SS	PC	DC12/24V	IP67
IG-02A-62	2W	W/R/G/B/Y	Dia62mm	304 SS	304 SS	PC	DC12/24V	IP67
IG-02A-75	3W	W/R/G/B/Y	Dia75mm	304 SS	304 SS	PC	DC12/24V	IP67
IG-02A-88	3W	W/R/G/B/Y	Dia88mm	304 SS	304 SS	PC	DC12/24V	IP67

INGROUND LIGHT

IG-01B









clear glass/frosted glass



Item No.	Power	Color	Size	Cover Ring	Housing	Recessing housing	Input Voltage	IP Rating
IG-01B-42	1W	W/R/G/B/Y	Dia42mm	304 SS	304 SS	PC	DC12/24V	IP68
IG-01B-52	1W	W/R/G/B/Y	Dia52mm	304 SS	304 SS	PC	DC12/24V	IP68
IG-01B-62	1W/3W	W/R/G/B/Y	Dia62mm	304 SS	304 SS	PC	DC12/24V	IP68
IG-01B-75	1W/3W	W/R/G/B/Y	Dia75mm	304 SS	304 SS	PC	DC12/24V	IP68

INGROUND LIGHT







IG-09

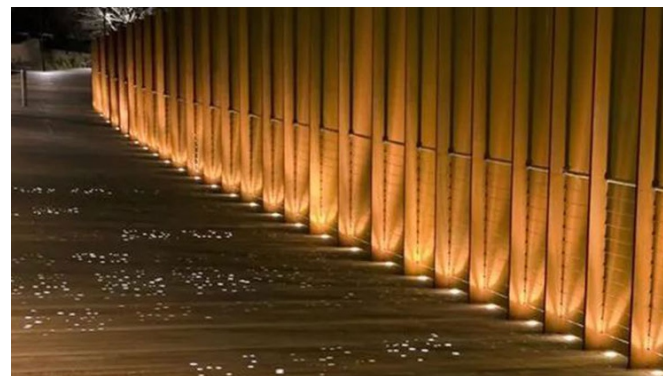

Item No.	LED Chips	Power	Color	Cover Ring	Housing	Input Voltage	IP Rating
IG-09	CREE/OSRAM	1Wx3/9/12/18/36;2Wx3/9/12/18/36	W/R/G/B/Y/RGB	stainless steel	Aluminium	DC24V/AC100-250V	IP67

INGROUND LIGHT

IG-05




Adjustable luminescent modules 0-30 degree

Item No.	LED Chips	Power	Color	Cover Ring	Housing	Input Voltage	IP Rating
IG-05	CREE/OSRAM	1Wx3/9/12/18/24;2Wx3/9/12/18/24	W/R/G/B/Y/RGB	stainless steel	Aluminium	DC24V/AC100-250V	IP67


INGROUND LIGHT

IG-08

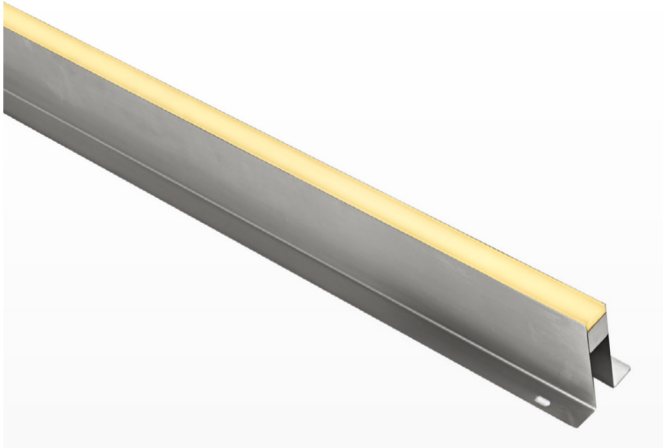

LED Chips	OSRAM
Power	7W/15W
Input Voltage	DC24V
Color	R/G/B/A/NW/WW
Size	500 / 1000x32x90mm
IP Rating	IP67
Housing	Stainless Steel 316L
Installation kit	Stainless Steel 316L

Dimensions(mm)

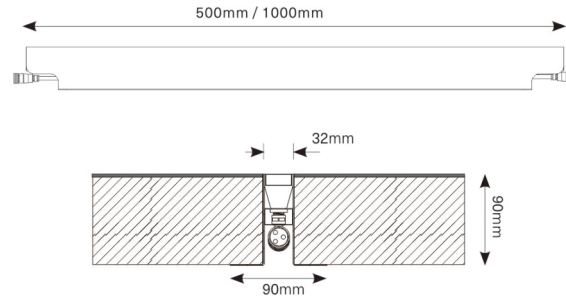

IG-08 is made of stainless steel 316L and frosted glass diffuser, and has been specifically designed to create seamless lighting lines.




The product is designed for walkover applications and is suitable for stages, landscapes, walkways, mood lighting.

INGROUND LIGHT

IG-07A



LED	CREE/Epistar 1Wx18/24/36
Housing	aluminium
Cover Ring	stainless steel
Color	W/R/G/B/Y/RGB
Input voltage	DC24V/AC85-265V
IP Rating	IP67

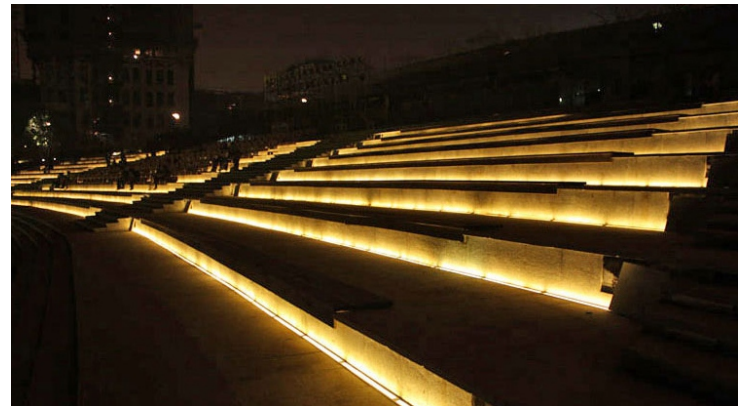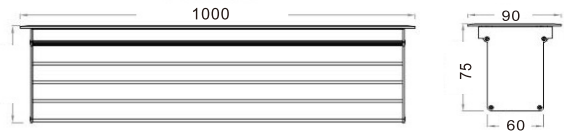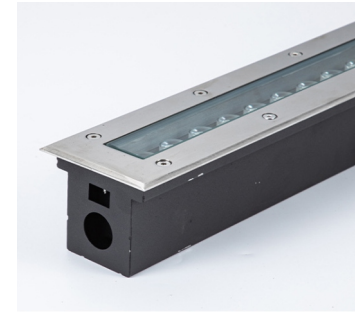


INGROUND LIGHT

IG-08C



clear glass/frosted glass

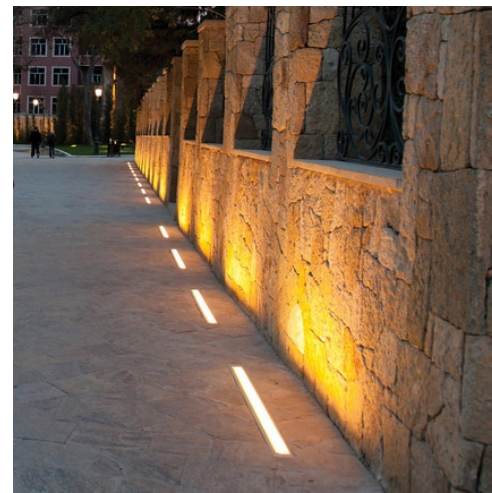


LED	12W
Housing	aluminium
Cover	6mm tempered glass
Color	W/R/G/B/Y/RGB
Beam angle	15/25/45/60degree
Input voltage	DC24V
Size	1000x30x75mm
IP Rating	IP67

FLOOD LIGHT



Optional Shading plate/Earth spike

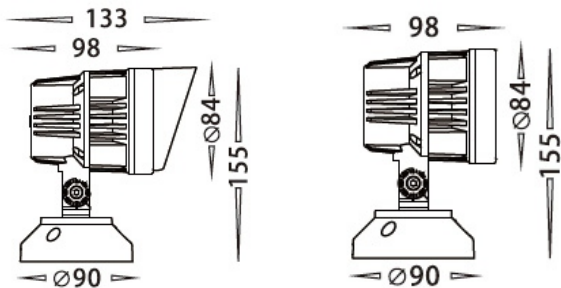

FL-02

LED	OSRAM 3x3W
Housing	Aluminium
Color	3000K-6000K
Beam angle	15/20/30/45/60degree
Input voltage	AC100-250V
Size	ø84x98 / 133mm
IP Rating	IP65




FLOOD LIGHT


FL-19




FL-19-3




FL-19-9



FL-19-18



FL-19-36



Optional Shading plate/Earth spike

Item No.	LED Chips	Power	Color	Size	Housing	Input Voltage	Beam angle	IP Rating
FL-19-3	OSRAM 1W/2W	3W/6W	W/R/G/B/Y	Dia75x107mm	Aluminium	AC100-240V	8/15/25/45/60degree	IP65
FL-19-9	OSRAM 1W/2W	9W/18W	W/R/G/B/Y	Dia125x150mm	Aluminium	AC100-240V	8/15/25/45/60degree	IP65
FL-19-18	OSRAM 1W/2W	18W/36W	W/R/G/B/Y	Dia160x180mm	Aluminium	AC100-240V	8/15/25/45/60degree	IP65
FL-19-36	OSRAM 1W/2W	36W/72W	W/R/G/B/Y	Dia180x200mm	Aluminium	AC100-240V	8/15/25/45/60degree	IP65

FLOOD LIGHT

FL-24



FL-24-3



FL-24-6



FL-24-9



FL-24-12



FL-24-18



FL-24-24



FL-24-48



FL-24-36

Optional Shading plate/Earth spike

Item No.	LED Chips	Power	Color	Size	Housing	Input Voltage	Beam angle	IP Rating
FL-24-3	Epistar	3x1W/3x2W	W/R/G/B/Y	Dia95x75x130mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-6	Epistar	6x1W/6x2W	W/R/G/B/Y	Dia130x95x165mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-9	Epistar	9x1W/9x2W	W/R/G/B/Y	Dia130x95x165mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-12	Epistar	12x1W/12x2W	W/R/G/B/Y	Dia150x100x180mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-18	Epistar	18x1W/18x2W	W/R/G/B/Y	Dia180x100x210mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-24	Epistar	24x1W/24x2W	W/R/G/B/Y	Dia230x120x320mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-36	Epistar	36x1W/36x2W	W/R/G/B/Y	Dia230x120x320mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65
FL-24-48	Epistar	48x1W/48x2W	W/R/G/B/Y	Dia290x150x350mm	Aluminium	AC85-265V	8/15/25/45/60degree	IP65

FLOOD LIGHT

FL-23



FL-23-50



FL-23-100



FL-23-150



FL-23-200



FL-23-300



FL-23-400



FL-23-500



Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	Beam angle	IP Rating
FL-23-50	Bridgelux	50W	2000-6500K	230x195x64mm	Aluminium	AC85-265V	60/90/120degree	IP65
FL-23-100	Bridgelux	100W	2000-6500K	285x238x68mm	Aluminium	AC85-265V	60/90/120degree	IP65
FL-23-150	Bridgelux	150W	2000-6500K	345x300x85mm	Aluminium	AC85-265V	60/90/120degree	IP65
FL-23-200	Bridgelux	200W	2000-6500K	415x345x110mm	Aluminium	AC85-265V	60/90/120degree	IP65
FL-23-300	Bridgelux	300W	2000-6500K	455x385x115mm	Aluminium	AC85-265V	60/90/120degree	IP65
FL-23-400	Bridgelux	400W	2000-6500K	495x425x118mm	Aluminium	AC85-265V	60/90/120degree	IP65
FL-23-500	Bridgelux	500W	2000-6500K	565x495x120mm	Aluminium	AC85-265V	60/90/120degree	IP65

FLOOD LIGHT

FL-26



FL-26-50



FL-26-100



FL-26-150



FL-26-200



FL-26-250



FL-26-300

Product Benefits:

Widely used, flexible combination. Good heat dissipation.

Application:

Tunnel, square, stadium, park, landscape lighting.



FL-26-400



FL-26-500



FL-26-600

Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	Beam angle	IP Rating
FL-26-50	Epistar	50Wx1	2000-6500K	350x175x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-100	Epistar	50Wx2	2000-6500K	350x250x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-150	Epistar	50Wx3	2000-6500K	350x340x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-200	Epistar	50Wx4	2000-6500K	350x410x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-250	Epistar	50Wx5	2000-6500K	350x485x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-300	Epistar	50Wx6	2000-6500K	350x575x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-400	Epistar	50Wx8	2000-6500K	665x370x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-500	Epistar	50Wx10	2000-6500K	665x455x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65
FL-26-600	Epistar	50Wx12	2000-6500K	665x535x75mm	Aluminium	AC85-265V	60/90/80X150degree	IP65

FLOOD LIGHT

FL-27



FL-27-6

FL-27-12


FL-27-18

FL-27-24

FL-27-36

FL-27-48

Item No.	LED Chips	Power	Color	Size	Housing	Input Voltage	Beam angle	IP Rating
FL-27-6	Epistar	6x1W	W/R/G/B/Y	Dia105x107x127mm	Aluminium	AC90-265V	15/20/30/45/60degree	IP65
FL-27-12	Epistar	12x1W	W/R/G/B/Y	Dia120x85x160mm	Aluminium	AC90-265V	15/20/30/45/60degree	IP65
FL-27-18	Epistar	18x1W	W/R/G/B/Y	Dia180x100x207mm	Aluminium	AC90-265V	15/20/30/45/60degree	IP65
FL-27-24	Epistar	24x1W	W/R/G/B/Y	Dia180x100x207mm	Aluminium	AC90-265V	15/20/30/45/60degree	IP65
FL-27-36	Epistar	36x1W	W/R/G/B/Y	Dia195x130x250mm	Aluminium	AC90-265V	15/20/30/45/60degree	IP65
FL-27-48	Epistar	48x1W	W/R/G/B/Y	Dia230x145x280mm	Aluminium	AC90-265V	15/20/30/45/60degree	IP65

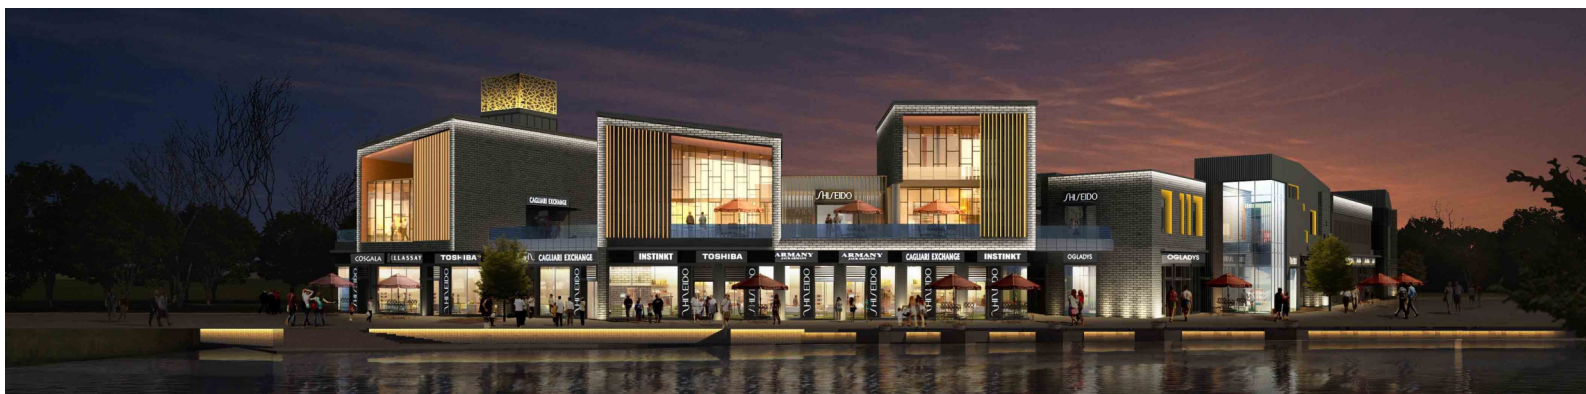

FLOOD LIGHT

FL-25



FL-25-50



FL-25-100



FL-25-150



FL-25-200



FL-25-300



Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	Beam angle	IP Rating
FL-25-50	Bridgelux	50W	2000-6000K	205x186x50mm	Aluminium	AC100-265V	90/120degree	IP65
FL-25-100	Bridgelux	100W	2000-6000K	245x235x50mm	Aluminium	AC100-265V	90/120degree	IP65
FL-25-150	Bridgelux	150W	2000-6000K	298x288x50mm	Aluminium	AC100-265V	90/120degree	IP65
FL-25-200	Bridgelux	200W	2000-6000K	340x330x64mm	Aluminium	AC100-265V	90/120degree	IP65
FL-25-300	Bridgelux	300W	2000-6000K	370x359x64mm	Aluminium	AC100-265V	90/120degree	IP65

HIGHBAY

HB-03




HB-03-100



HB-03-150



HB-03-200

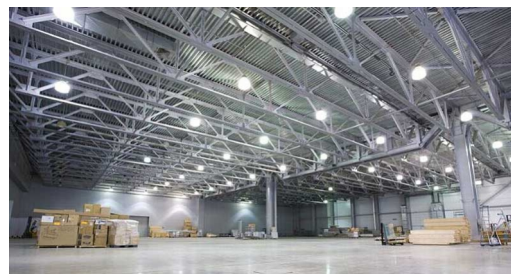

Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	Beam angle	IP Rating
HB-03-100	Bridgelux	100W	2000-6500K	280x280x125mm	Aluminium	AC100-265V	60/90/120degree	IP65
HB-03-150	Bridgelux	150W	2000-6500K	340x340x125mm	Aluminium	AC100-265V	60/90/120degree	IP65
HB-03-200	Bridgelux	200W	2000-6500K	400x400x135mm	Aluminium	AC100-265V	60/90/120degree	IP65

STREET LIGHT

ST-05



Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	Beam angle	IP Rating
ST-05-50	SanAn	50W	3000-6000K	500x215x65mm	Aluminium	AC85-265V	120degree	IP65
ST-05-100	SanAn	100W	3000-6000K	720x280x80mm	Aluminium	AC85-265V	120degree	IP65
ST-05-150	SanAn	150W	3000-6000K	850x320x80mm	Aluminium	AC85-265V	120degree	IP65
ST-05-200	SanAn	200W	3000-6000K	950x330x80mm	Aluminium	AC85-265V	120degree	IP65
ST-05-250	SanAn	250W	3000-6000K	1100x340x90mm	Aluminium	AC85-265V	120degree	IP65

WALL WASHER


WW-08

Product features:

Wiring ducts can be hidden. Seamless connection, no dark regions. Easy installation.

Applicable:

Building facades, railings, garden, landscape, billboard, etc.

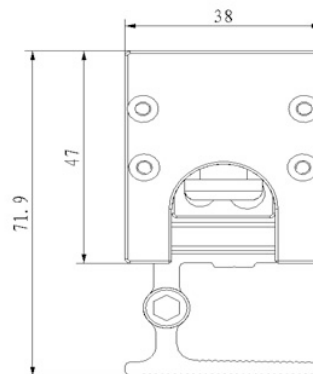

LED Chips	OSRAM
Power	18W/24W/36W
Beam angle	5/10/15/30/45/60/10x60/25x45degree
Input Voltage	DC24V
Color	W/R/G/B/Y
Size	1000x38x47mm
IP Rating	IP65
Housing	Aluminum

WALL WASHER

WW-06



Optional Shading plate

Product features:

Seamless connection. Extruded aluminum housing characterized by the heat dissipation section, die cast end cap and ultra-white tempered glass are fully gasketed with high quality solid silicon gasket, IP65. Anodized and super durable thermoset power coat finish.

Size: 1000x35x32mm.

Applicable:

Building facades, railings, garden, landscape, billboard, etc.

ITEM No.	LED Chips	Power	Color	CRI	Voltage	Beam angle	Housing	IP Rating
WW-06-18	OSRAM	18W	2000-6500K/RGB	Ra80	DC24V	15/30/60/90/10x60degree	Aluminum	IP65
WW-06-24	OSRAM	24W	2000-6500K/RGB	Ra80	DC24V	15/30/60/90/10x60degree	Aluminum	IP65
WW-06-36	OSRAM	36W	2000-6500K/RGB	Ra80	DC24V	15/30/60/90/10x60degree	Aluminum	IP65


WALL WASHER



WW-11



WW-12

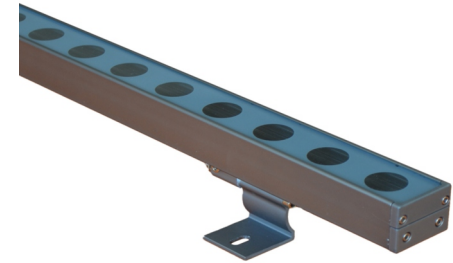

WW-13

ITEM No.	LED Chips	Power	Size	Color	Voltage	Beam angle	Housing	IP Rating
WW-11	Bridgelux/OSRAM	24/36W	1000x40x29mm	2000-6500K/RGB	DC24V	30/60/90/10x60degree	Aluminum	IP65
WW-12	Bridgelux/OSRAM	18/24W	1000x34x27mm	2000-6500K/RGB	DC24V	30/60/90/10x60degree	Aluminum	IP65
WW-13	Bridgelux/OSRAM	24/36W	1000x39x30mm	2000-6500K/RGB	DC24V	30/60/90/10x60degree	Aluminum	IP65

Optional Shading plate



LINEAR LIGHT



LL-13A



LL-13B



LL-15



LL-16



LL-11C


Item No.	LED Chips	Power	Color	Size	Housing	Input Voltage	Beam angle	IP Rating
LL-13A	Epistar/Bridgelux	12W	2000-6000K/RGB	1000x30x30mm	Aluminium	DC24V	120degree	IP65
LL-13B	Epistar/Bridgelux	12W	2000-6000K/RGB	1000x30x30mm	Aluminium	DC24V	120degree	IP65
LL-15	Epistar/Bridgelux	12W	2000-6000K/RGB	1000x25x40mm	Aluminium	DC24V	120degree	IP65
LL-16	Epistar/Bridgelux	12W	2000-6000K/RGB	1000x30x48mm	Aluminium	DC24V	120degree	IP65
LL-11C	Epistar/Bridgelux	12W	2000-6000K/RGB	1000x30x45mm	Aluminium	DC24V	120degree	IP65



PIONT LIGHT /WINDOW SILL LAMP




PL-01A



LED	OSRAM 0.25Wx12
Beam angle	120Degree
Input Voltage	DC24V
Color	Single color/RGB
Size	ø90x51mm
IP Rating	IP65
Housing	Aluminum




PL-01B



LED	OSRAM 0.25Wx18
Beam angle	120Degree
Input Voltage	DC24V
Color	Single color/RGB
Size	ø120x71mm
IP Rating	IP65
Housing	Aluminum



WL-18



LED	CREE/OSRAM 2Wx6
Beam angle	8x180Degree
Input Voltage	DC24V/AC100-250V
Color	Single color/RGB
Size	100x52x92mm
IP Rating	IP65
Housing	Aluminum

STEP LIGHT



WL-10A



WL-14A




WL-16A



WL-20

Item No.	Power	CCT	Size	Housing	Input Voltage	IP Rating
WL-10A	3W	2000-6000K	86x86x50mm	Aluminium	DC24V	IP66
WL-14A	3W/5W	2000-6000K	110x45x55/170x70x55mm	Aluminium	DC24V	IP66
WL-16A	3W/6W	2000-6000K	145x65x70/227x127x78mm	Aluminium	DC24V	IP66
WL-20	3W	2000-6000K	105x40x50mm	Aluminium	DC24V	IP66

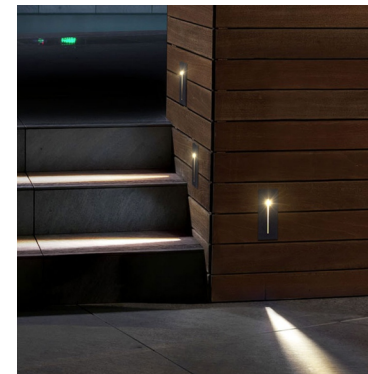

WALL LIGHT


WL-21



Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	IP Rating
WL-21-3R	Epistar/Bridgelux	3W	2000-6000K	ø65x160mm	Aluminium	AC100-265V	IP65
WL-21-6R	Epistar/Bridgelux	6W	2000-6000K	ø90x160mm	Aluminium	AC100-265V	IP65
WL-21-12R	Epistar/Bridgelux	12W	2000-6000K	ø110x200mm	Aluminium	AC100-265V	IP65
WL-21-18R	Epistar/Bridgelux	18W	2000-6000K	ø145x200mm	Aluminium	AC100-265V	IP65
WL-21-24R	Epistar/Bridgelux	24W	2000-6000K	ø160x300mm	Aluminium	AC100-265V	IP65
WL-21-3R2	Epistar/Bridgelux	3Wx2	2000-6000K	ø65x160mm	Aluminium	AC100-265V	IP65
WL-21-6R2	Epistar/Bridgelux	6Wx2	2000-6000K	ø90x260mm	Aluminium	AC100-265V	IP65
WL-21-9R2	Epistar/Bridgelux	9Wx2	2000-6000K	ø110x300mm	Aluminium	AC100-265V	IP65
WL-21-12R2	Epistar/Bridgelux	12Wx2	2000-6000K	ø110x300mm	Aluminium	AC100-265V	IP65
WL-21-18R2	Epistar/Bridgelux	18Wx2	2000-6000K	ø145x300mm	Aluminium	AC100-265V	IP65
WL-21-24R2	Epistar/Bridgelux	24Wx2	2000-6000K	ø160x300mm	Aluminium	AC100-265V	IP65

WALL LIGHT

WL-21

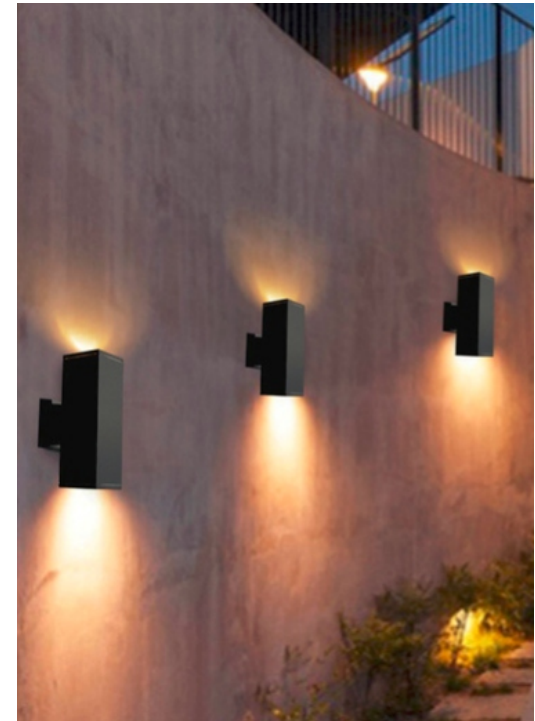

Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	IP Rating
WL-21-3S2	Epistar/Bridgelux	3Wx2	2000-6000K	65x65x160mm	Aluminium	AC100-265V	IP65
WL-21-6S2	Epistar/Bridgelux	6Wx2	2000-6000K	90x90x260mm	Aluminium	AC100-265V	IP65
WL-21-9S2	Epistar/Bridgelux	9Wx2	2000-6000K	120x120x300mm	Aluminium	AC100-265V	IP65
WL-21-12S2	Epistar/Bridgelux	12Wx2	2000-6000K	120x120x300mm	Aluminium	AC100-265V	IP65
WL-21-15S2	Epistar/Bridgelux	15Wx2	2000-6000K	150x150x300mm	Aluminium	AC100-265V	IP65
WL-21-18S2	Epistar/Bridgelux	18Wx2	2000-6000K	150x150x300mm	Aluminium	AC100-265V	IP65

WALL LIGHT

WL-08



WL-08A



WL-08B



Item No.	LED Chips	Power	CCT	Size	Housing	Input Voltage	IP Rating
WL-08A	Epistar/Bridgelux	5Wx2	2000-6000K	100x100x200mm	Aluminium	AC100-265V	IP65
WL-08B	Epistar/Bridgelux	5Wx2	2000-6000K	100x100x200mm	Aluminium	AC100-265V	IP65